

#### **TZ-606B AS**

#### **COLUMN SPEAKER**



The TZ Series Column Speakers are highly efficient compact speakers that deliver excellent sound performance in medium sized venues such as houses of worship, gymnasiums, auditoriums and more.

## Key features


- Column Speaker is suitably designed for in-door use and/or outdoor use.
- Efficient for use in a spacious room.
- The speaker unit is designed to reproduce sound with good clarity and high input power capacity.
- The plastic column speaker comes with speaker bracket as accessories.
- The speaker bracket offers better installation flexibility.

# Specifications

Enclosure	Sealed Type
Rated Input	60 W
Rated Impedance	100 V line: 170 $\Omega$ (60 W), 330 $\Omega$ (30 W), 670 $\Omega$ (15 W), 1.3 k $\Omega$ (7.5 W) 70 V line: 170 $\Omega$ (30 W), 330 $\Omega$ (15 W), 670 $\Omega$ (7.5 W), 1.3 k $\Omega$ (3.8 W)
Sensitivity	95 dB (1 W, 1 m)
Frequency Response	150 Hz - 16,000 Hz
Speaker Component	10 cm (4") cone type x 6
Input Terminal	Push-In terminal
Finish	Enclosure: HIPS, black, paint Punched Net: Surface-tread steel plate, black, paint Speaker Bracket: Aluminum die-cast, black, paint Joint Bracket, Wall Bracket: Steel plate, t:1.6mmm, black, paint
Dimensions	135 (W) x 746 (H) x 128 (D) mm (5.31" x 29.37" x 5.04")
Weight	5.5 kg (12.12 lbs.) unit only
Included Accessories	Speaker Bracket $\times$ 1, Joint Bracket $\times$ 1, Wall Bracket $\times$ 1, Fixing Bolt (M5 $\times$ 60) $\times$ 1, Hexagon Bolt (M6 $\times$ 12) (with plain washer and spring washer) $\times$ 2, Machine Screw (M5 $\times$ 20) (with plain washer and spring washer) $\times$ 2, Hexagon Bolt (M8 $\times$ 15) $\times$ 1
Optional Accessories	Speaker Stand: ST-16A



### **Dimensions**

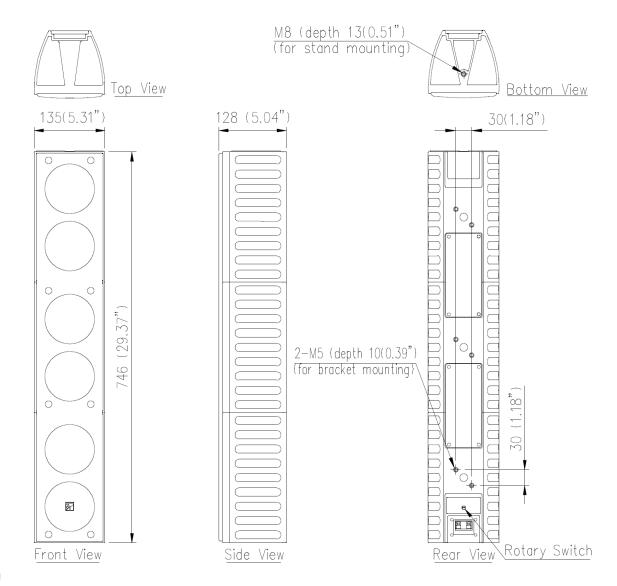

UNIT: mm

